


Bare Battens CoverLock

A range of slim battens designed for weld-free manufacturing with plastic injection moulded knock-on end caps and bridge brackets.

This innovative "CoverLock" feature enables tool-free installation of batten covers and subsequent access for maintenance.

Suitable for general illumination applications.

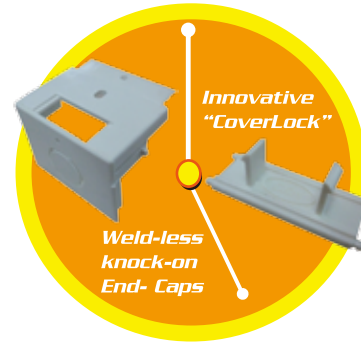

Dimension of Fittings

Model	Wattage (Tubes)	Length	Diagram
GLC 120/CLK	1 x 18W	611 mm	
GLC 140/CLK	1 x 36W	1221 mm	
GLC 158/CLK	1 x 58W	1521 mm	
GLC 170/CLK	1 x 70W	1821 mm	
GLC 220/CLK	2 x 18W	614 mm	
GLC 240/CLK	2 x 36W	1224mm	
GLC 258/CLK	2 x 58W	1524 mm	
GLC 270/CLK	2 x 70W	1824 mm	

Accessories / Options



Metal Reflector



Suspension Rods for 2ft/4ft



Twin Lampholder Bracket

Key Features



Tool-Free Access