



U-LI Goodlite's range of modular fittings is equipped with framed prismatic diffuser. This luminaire is designed for efficient, economical and no-frills illumination of interior spaces and thus blends into the environment effortlessly. It is an ideal ceiling lighting panel providing evenly distributed and pleasantly diffused general illumination. Available in different size options to suit surface and recessed mounted ceilings. All framed diffusers are located by posi-bolt which allowed them to swing down for luminaire maintenance.



**Imperial Ceiling Type Recessed Tee Bar Mounted Fitting**

Dimension of Fittings

Model	Wattage (Tubes)	Length L1	Length L2	Profile
GAC 2222/AL	2 x 18W	598mm	610mm	
GAC 3222/AL	3 x 18W	598mm	610mm	
GAC 4222/AL	4 x 18W	598mm	610mm	
GAC 2424/AL	2 x 36W	1208mm	1220mm	
GAC 3424/AL	3 x 36W	1208mm	1220mm	
GAC 4424/AL	4 x 36W	1208mm	1220mm	
GAC 2212/AL	2 x 18W	598mm	610mm	
GAC 2414/AL	2 x 36W	1208mm	1220mm	
GAC 1202/AL	1 x 18W	598mm	610mm	
GAC 1404/AL	1 x 36W	1208mm	1220mm	

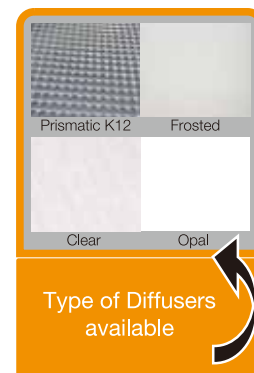

**Metric Ceiling Type Recessed Tee Bar Mounted Fitting**

Dimension of Fittings

Model	Wattage (Tubes)	Length L1	Length L2	Profile
GAC 2222/AL/MM	2 x 18W	595mm	610mm	
GAC 3222/AL/MM	3 x 18W	595mm	610mm	
GAC 4222/AL/MM	4 x 18W	595mm	610mm	
GAC 2424/AL/MM	2 x 36W	1195mm	1220mm	
GAC 3424/AL/MM	3 x 36W	1195mm	1220mm	
GAC 4424/AL/MM	4 x 36W	1195mm	1220mm	
GAC 2212/AL/MM	2 x 18W	595mm	610mm	
GAC 2414/AL/MM	2 x 36W	1195mm	1220mm	
GAC 1202/AL/MM	1 x 18W	595mm	610mm	
GAC 1404/AL/MM	1 x 36W	1195mm	1220mm	