


Clean Room Fitting

For production in special environment conditions, U-LI Goodlite's gasketed modular fittings are specially designed to meet such demanding manufacturing requirements through the emphasis on high rigidity constructions and meticulous fabrication workmanship. Application includes pharmaceutical places, food processing industries, precision engineering and semiconductor assembly plants.

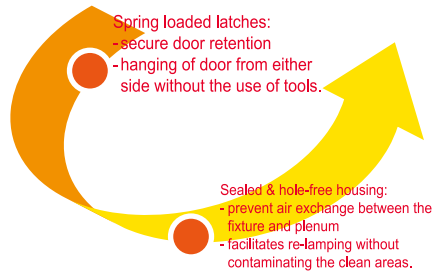

Both housing and door frame are sealed with gasketing.

Imperial Ceiling Type Recessed Tee Bar Mounted Fitting


Dimension of Fittings

Model	Wattage (Tubes)	Length L1	Length L2	Profile
GAC 2222/CR	2 x 18W	598mm	615mm	
GAC 3222/CR	3 x 18W	598mm	615mm	
GAC 4222/CR	4 x 18W	598mm	615mm	
GAC 2424/CR	2 x 36W	1208mm	1225mm	
GAC 3424/CR	3 x 36W	1208mm	1225mm	
GAC 4424/CR	4 x 36W	1208mm	1225mm	
GAC 2212/CR	2 x 18W	598mm	615mm	
GAC 2414/CR	2 x 36W	1208mm	1225mm	



**Customised dimensions available upon request



Continuous foam seal makes the joint between frame, diffuser and luminaire housing tight.

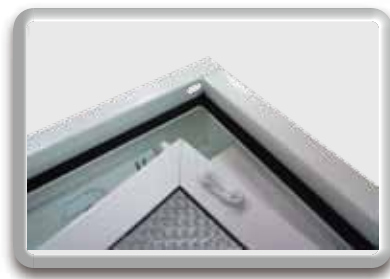

Top access from outside of room. Hermitically sealed to meet stringent standards.



As mounted on Tee Bar